
CONNECTORS AND ADAPTERS

SN EZ-Flip polarity-changeable connector

SN EZ-Flip duplex connector with changeable polarity, so A-B and B-A can be set without re-terminating.

KEY FEATURES

- Polarity can be changed on the connector
- Duplex Base-2 connector
- Typical single-mode loss 0.05 to 0.12 dB
- Single-mode and multimode, UPC or APC
- Four SN duplex fit where two LC duplex go

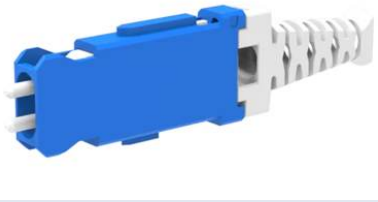

SPECIFICATIONS

Type	Duplex SN connector, polarity changeable (EZ-Flip)
Fibre count	2 fibres (Base-2)
Fibre type	Single-mode and multimode
Polish	UPC and APC (single-mode)
Typical insertion loss	0.05 to 0.12 dB single-mode, 0.05 dB multimode
Maximum insertion loss	0.15 to 0.25 dB single-mode, 0.15 dB multimode
Return loss	At least 55 dB UPC, 65 dB APC, 25 dB multimode
Operating temperature	-40 to +75 C
Durability	Under 0.2 dB change after 500 matings
Ferrule	125 um single-mode, 127 um multimode

APPLICATIONS

- Duplex links where polarity must be set or corrected on site
- Dense patching in data centres
- Transceiver patch cords

HOW TO ORDER, SEND US

- Fibre type, polish and grade (Premium or Low Loss)
- Cable type and outer diameter
- Required polarity (A-B or B-A)
- Quantity, loose or built into a cord
- Cord length and tolerance, if built
- Labelling requirements

OPTIONS

Fibre type	Single-mode, Multimode
Polish	UPC, APC
Grade	Premium, Low Loss

Price on request

Send your drawing or part list. An engineer reads every request and replies with questions or a quote.

Request a quote

Scan, or open radixfibrotech.com/connectors/sn-polarity-changeable-connector/

Specifications are as published for this product. The final specification, lengths and lead time are confirmed in your quotation.

Radix Fibrotech | 165, Shukrawar Peth, Laxmidatta Apartments, Shinde Ali, Near Kelkar Museum, Pune 411002, India
Phone and WhatsApp +91 99702 02526 | sales@radixfibrotech.com | radixfibrotech.com | Mon to Fri 09:00 to 18:00 IST | Datasheet rev. 2026-11